

Features

- Pressure ranges from Vacuum through 2,000 psi (140 bar)
- Accuracy better than 0.015% of reading. (Increased accuracy option of 0.008%.)
- Gas operated with optional hand pumps
- Dual vacuum/pressure models available
- Psi, bar, kgf/cm², kPa and MPa ranges available

The Pressurements 3000 Series is the culmination of over 50 years experience in the production and design of primary pressure standards. With features designed to improve accuracy and performance, increase reliability and simplify operation these deadweight testers can be used to calibrate virtually any pressure sensing device, including transducers, transmitters, gauges or pressure switches.

Each instrument is supplied with a detachable lid that makes it neat, compact and easily portable. The weight masses are stored in a high-quality case with a self-locking mechanism to protect them during transit. All units are provided with a traceable certificate of accuracy, weight mass details, 1/8, 1/4, 3/8 and 1/2 NPT or BSP female adaptors, operating fluid (where applicable) and spare seals.

The piston/cylinder assemblies are manufactured to the very highest standards with certified accuracies traceable to international standards laboratories such as the National Institute of Standards and Technology (NIST).

P3000 Series

Pneumatic Deadweight Testers Model P3000


The P3000 Series is a Pressurements product. Pressurements has joined other GE high-technology sensing businesses under a new name—GE Industrial, Sensing



Pneumatic Deadweight Testers Model P3000

Operating Principle

Deadweight testers are the primary standard for pressure measurements. Utilizing the well proven piston-gauge system consisting of a vertically mounted, precision lapped piston and cylinder assembly, accurately calibrated weight masses (Force) are loaded on the piston (Area), which rises freely within its cylinder. These weights balance the upward force created by the pressure within the system.

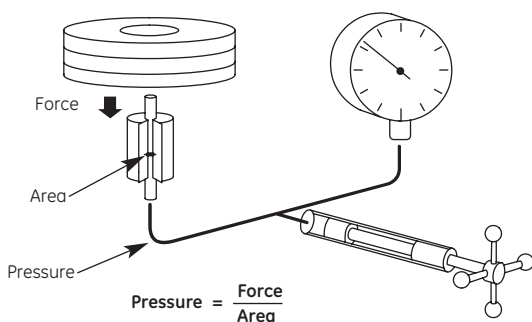

The pressure is measured when placed on a correctly spinning and floating piston. The total pressure measured is the summation of the weights plus the piston weight carrier assembly.

Instrument Base

There are four basic variations in the pneumatic offering; single pressure, single vacuum, dual vacuum and pressure, and oil-lubricated pneumatically driven high-pressure models. Pressure or vacuum is generated by an external source or an optional built-in hand pump. The hand pump option is not available on instruments above 500 psi (35 bar).

Piston/Cylinder Assemblies

The piston/cylinder assembly is the heart of each deadweight tester. They are manufactured from materials that provide stability, durability, and low thermal coefficients and distortion. Our experience and knowledge of piston/cylinder production and calibration ensure the precision and performance required for today's demanding calibration requirements.

Weight Masses

Standard weight masses are series 3 non-magnetic austenitic stainless steel. Each mass is marked with the serial number of the instrument and the nominal pressure value relative to the high- or low-pressure piston, when applicable. Vacuum weights and the optional fractional weights are stainless steel and/or solution heat treated aluminum.

Gravity Correction

Gravity varies significantly with geographical location and this variation has a direct effect on the force of the weights and the accuracy of the deadweight tester. Each instrument can be calibrated to local gravity at no extra cost. If unspecified, instruments will be calibrated to Standard Gravity at 980.665 cm/s².

Gas Supply

All instruments are fitted with a ¼ NPT female external supply port for connection to the gas supply source. A compressed gas bottle (nitrogen or dry air) fitted with a pressure regulator is recommended. Ten percent above the maximum pressure is required. A built-in hand pump is available on some models to generate pressures to 300 psi (20 bar).

For vacuum requirements, an external vacuum pump can be connected to the ¼ NPT port. The built-in hand pump will also generate up to 90% vacuum.

Features

- Piston/cylinder design provides stability and repeatability
- Built-in pneumatic hand pumps for pressure and vacuum
- Piston flotation indicator
- High quality needle valves provide optimum control
- Mounted spirit level and adjustable feet
- Test station design with O-rings eliminates the need for PTFE tape or wrenches
- Improved case with spring-loaded latches for hood
- Sturdy weight box with hinged lid and side handles for easy transport

P3000 Series Single Pressure Models

Air Operated - Single PCU		Air Operated - Single PCU	
Model #	Pressure Range	Model #	Pressure Range
P3012-4-P	1.5 to 100 kPa	P3015-1-P*	0.2 to 35 bar
-6-P	15 to 1,000 mbar	-2-P*	0.2 to 35 kgf/cm ²
-7-P	5 to 400 inH ₂ O	-3-P*	3 to 500 psi
		-4-P*	20 to 3,500 kPa
		-5-P*	0.02 to 3.5 MPa
P3013-4-P	3 to 200 kPa	P3016-1	1 to 70 bar
-6-P	30 to 2,000 mbar	-2	1 to 70 kgf/cm ²
-7-P	12 to 800 inH ₂ O	-3	10 to 1000 psi
P3014-1-P	0.2 to 10 bar	-4	100 to 7000 kPa
-2-P	0.2 to 10 kgf/cm ²	-5	0.1 to 7 MPa
-3-P	3 to 150 psi		
-4-P	20 to 1,000 kPa		
-5-P	0.02 to 1 MPa		

* -P indicates built-in pump optional.

P3000 Series Vacuum and Dual Vacuum/Pressure Models

The combined vacuum/pressure models are extremely versatile instruments providing vacuum through 500 psi (35 bar) capacity in one unit. For added expansion, an additional low range piston/weight set can be provided for pressures to 800 inH₂O (2,000 mbar). An optional built-in hand pump can be installed to generate vacuum (90%) through 300 psi.



Vacuum Operated - Single PCU	
Model #	Vacuum Range
P3011-4-P*	3 to 100 kPa
-6-P*	30 to 1,000 mbar
-8-P*	1 to 30 inHg
-9-P*	30 to 760 mmHg

Air Operated - Dual PCU		
Model #	Pressure Range	Vacuum Range
P3022-4-P*	1.5 to 100 kPa	3 to 100 kPa
-6-P*	15 to 1,000 mbar	30 to 1,000 mbar
-7-P*	5 to 400 inH ₂ O	1 to 30 inHg
P3023-4-P*	3 to 200 kPa	3 to 100 kPa
-6-P*	30 to 2,000 mbar	30 to 1,000 mbar
-7-P*	12 to 800 inH ₂ O	1 to 30 inHg

* -P indicates built-in pump optional.

Air Operated - Dual PCU

Model #	Pressure Range	Vacuum Range
P3025-1-P*	0.2 to 35 bar	30 to 1,000 mbar
-2-P*	0.2 to 35 kgf/cm ²	30 to 760 mmHg
-3-P*	3 to 500 psi	1 to 30 inHg
-4-P*	20 to 3,500 kPa	3 to 100 kPa
-5-P*	0.02 to 3.5 MPa	3 to 100 kPa

* -P indicates built-in pump optional.


P3000 Series Liquid Lubricated Gas Operated Models

The Models P3031 and P3032 feature an oil lubricated piston/cylinder assembly, which ensures that the instrument is less susceptible to performance issues caused by contamination of the gas supply or the environment in which the unit is being operated.

The supply gas, via the deadweight tester controls, is introduced into the piston/cylinder chamber. As the gas acts directly on the surface of the oil, there is a rate-less transfer of pressure within the system.

The instrument is designed to prevent inadvertent over-filling of the chamber, thus avoiding contamination of the gas system. There is no physical barrier between the gas and oil so there is some "oil-mist" transfer potential. Therefore, we do not recommend the standard version for oxygen service. A special version of these instruments using an oxygen-compatible fluid is available.

Model #	Pressure Range
P3031-1	1 to 70 bar
-2	1 to 70 kgf/cm ²
-3	10 to 1,000 psi
-4	100 to 7,000 kPa
-5	0.1 to 7 MPa
P3032-1	4 to 140 bar
-2	4 to 140 kgf/cm ²
-3	40 to 2,000 psi
-4	400 to 14,000 kPa
-5	0.4 to 14 MPa

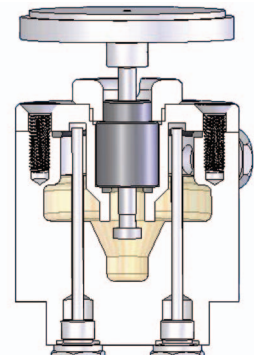

Cross-sectional illustration of liquid lubricated piston chamber



P3000 Series Specifications

Accuracy*

±0.015% of reading (±0.008% optional)
*Accuracy based on % of reading from 10% to 100% of the piston range when used in accordance with the corrections found on the calibration certificate. Below 10% ± (accuracy class) x 10% of the piston range.

Mass and PCU Materials of Construction

Standard weight material	Series 3 non-magnetic austenitic stainless steel
Weight density	7.8 g/cm ³
Optional fractional weights	Solution heat treated aluminum
Weight density	2.7 g/cm ³

Model	Piston Material	Cylinder Material	Coefficient of Expansion
P3011, P3012, P3013 P3022, P3023, P3025 (V)	Ceramic	Martensitic steel	11 ppm/°C
P3014, P3015, P3025 (P) P3031, P3032 (P & V)	Tungsten carbide	Martensitic steel	16.5 ppm/°C
P3016	Tungsten carbide	Tungsten carbide	11 ppm/°C

General

Test port adaptors	1/8, 1/4, 3/8 and 1/2 NPT or BSP
Instrument weight	24 lbs
Instrument size	17.5 W x 12 D x 8.5 H
Mass set weight (typical)	65 lbs

Weight Increments*

Minimum Standard Weight Increments

P3012, P3022 Pressure	1 inH ₂ O, (5 mbar)
P3013, P3023 Pressure	2 inH ₂ O, (10 mbar)
P3014, P3015, P3025 Pressure	1 psi, (0.1bar)
P3016, P3031, P3032	1 psi, (0.1bar)
P3011, P3022, P3023, P3025 Vacuum	0.2 inHg (10 mbar)

Optional Fractional Weights

P3014, P3015, P3025 Pressure	0.1 psi (0.01 bar)
------------------------------	--------------------

*For a complete weight breakdown for each model, please refer to document ER4012.

Built-in Hand Pumps

Pressure mode	Max pressure 300 psi (20 bar)
Vacuum mode	To 90% vacuum

Operating Fluid for Liquid Lubricated Models

55-655 mineral oil (standard)
Krytox, for oxygen-safe applications (optional)

Options

A) PressCal Software

Windows-based software program that allows users to easily apply all necessary corrections to enhance the deadweight tester performance. Calibration details are then stored and/or used to automatically create a calibration certificate. PressCal is provided as standard with all 0.008% instruments.

B) Krytox, as operating fluid for liquid lubricated gas operated models.



©2006 GE. All rights reserved.
920-380A

All specifications are subject to change for product improvement without notice. GE® is a registered trademark of General Electric Co. Other company or product names mentioned in this document may be trademarks or registered trademarks of their respective companies, which are not affiliated with GE.